COMPARISON WITH OTHER PANELS

- ▶ 2x times more light output
- best quality Osram LED
- super slim shock resistant aluminum body
- ▶ more than bi-colour 2700K to 6500K
- ▶ bi-directional DMX RDM
- modular design for multipanel
- affordable european made quality
- ▶ two years warranty. Made in Barcelona (Spain)



www.thelight.com.es


info@thelight.com.es

Intellectual Property

THELIGHT VELVET light technology is protected under spanish patents and international patents pending 2014 © Copyright THELIGHT. All rights reserved.

the most robust & advanced LED panel



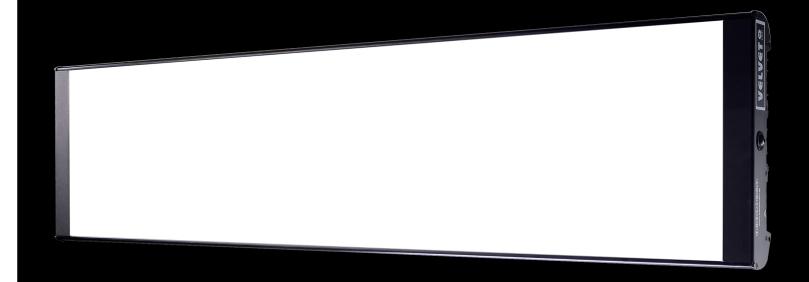

ROBUST

Rocky body 100% aluminum

SOFT LIGHT

Natural shadow-less light

POWERFUL

1000 Lux at 3m / 10 ft





MADE TO LAST

100% aluminium body

Robust body made to endure the tougher working conditions on any location or studio

Best quality OSRAM LED

THELIGHT electronics and heatsink keep the LED in the optimum temperature to last beyond 50.000 hours



NATURAL SOFT LIGHT

Incredibly soft and wraparound quality light to easily get beauty shots and natural portraits

MORE THAN BI-COLOR

VELVET is more than tungsten & daylight in the same unit: you can adjust color temperature from 2700K to 6500K

AC/DC POWERED

VELVET is always ready to operate worldwide: using any battery from 26 to 28 VDC with universal AC power 90-264 VAC

QUALITY WHITE LIGHT

CRI <90 to get perfect skin tones and real colors with any HD or photo camera

Professional and consistent color rendition

Professional and consistent color rendition
Absolutely consistent lamp to lamp to mix
as many units as you wish and get exactly
the same light quality and color reproduction

ADVANCED DMX RDM

DMX remote control even without a controller!

Master-slave function: link several units and operate without console. The Master will be the controller for the other units

Bi-directional DMX-RDM: perfect solution on studio simplifying the asignment and channel addressing of every fixture

ADVANTAGES

- ▶ Best quality Osram LED
- ► High output 1000 Lux at 3m
- ▶ More than bi-colour 2700K to 6500K digital
- Quick set up with shock resistant buttons
- ► Worldwide AC & DC powered
- ► Super slim (68mm), easy to rig
- Modular design for multipanel
- ► Flicker free up to 3000 fps
- ► Silent fan-free operation
- ▶ 100% Made in Barcelona (Spain)




VELVET LIGHT 4 includes:

- ▶ on-board and DMX RDM digital control over:
 - ► Color temperature 2700K to 6500K
 - ► smooth Flicker-free dimming 0 to 100
- ► input for battery power 26-28VDC
- detachable power supply 90-264VAC
- ► XLR-5 in&out connectors for remote DMX control
- ▶ center mount with combined 28 / 16mm pin
- two years warranty

TECHNICAL SPECIFICATIONS

VELVET 4

COLOR TEMPERATURE	adjustable from 2700K to 6500K
LIGHT INTENSITY	dimmable 0 to 100 (smooth and flicker-free)
DIMENSIONS	1250 x 308 x 68 mm
WEIGHT	11 Kg (panel)
POWER DRAW	290 W
POWER SUPPLY	26-28V DC 90-264V AC 50/60Hz
PHOTOMETRICS	6000 Lux / 556 fc at 1m / 3 feet 1000 Lux / 93 fc at 3m / 10 feet 280 Lux / 26 fc at 6m / 20 feet
BEAM ANGLE	100°
LED RATED LIFE	more than 50.000 hours
COOLING	no noise, fan-free passive cooling
PROTECTION & CONSTRUCTION	dustproof IP51 rated, made of black anodized extruded aluminum and black powder coated sheet aluminum
VELVET LED TECHNOLOGY	OSRAM selected BIN LED + optic diffuser + CPU software control
QUICK MOUNTING ACCESSORIES	AC power supply, foldable Snapgrid 40° and 20°, center mount swivel ball head, yoke mount, pole-op and multipanel yokes, power supply extension cable,removable barn doors, flight case

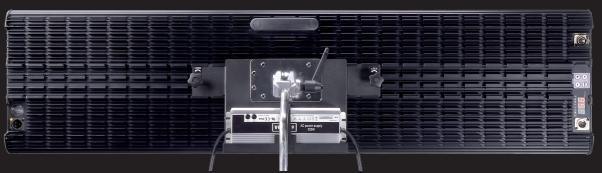



Specifications subjects to change without notice